



Standard Mat

BM 30-75H 3PE5



DESCRIPTION: A tough, hardwearing mineral loaded vinyl flooring and sound barrier mat with a hessian substrate for added strength and dimensional stability. The supporting layer is comprised of a rot and water resistant Primafoam® polyolefin foam.


APPLICATION: Designed to improve the sound insulation of existing panels of metal, wood, plastic etc., at all frequencies. The materials excellent resistance to fuel and engine oil makes it ideal for use as a floormat in Commercial Vehicles.

PHYSICAL PROPERTIES:

Wearing Layer:	
Colour:	Black
Emboss:	10mm Square (in total)
Superficial Weight:	7.5Kg/m ² (+/- 10%)
Nominal Thickness:	4.8mm (approx.)
Abrasion:	Taber CS10 Wheels, 10.000 cycles, 2.8% loss by weight
Flammability:	FMVSS 302 Self-extinguishing
Operating Temperature (Static):	-20° to +70° C
Foam Layer:	
Type:	Closed Cell Cross-linked PE Foam
Colour:	Blue
Density (pre lamination):	30Kg/m ³ (+/- 10kg/m ³)
Thickness (post lamination):	4mm (+/- 1mm)

Acoustic Properties:

Transmission Loss ESO R140 on Steel plate

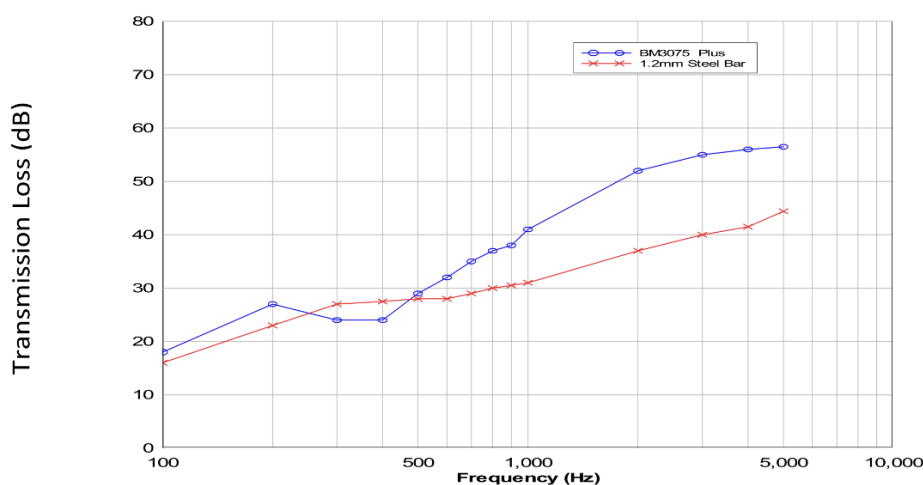

The information provided in this data sheet is in good faith. No liability is however accepted, for errors and omission and in no circumstances shall B6 Akustik